



ARANKA

USER MANUAL

AIPOC-35

ORP CONTROLLER

Ver. 1.0





SPECIFICATIONS

POWER	: 220~240VAC , 50HZ
RANGE	: -2000~ + 2000mV
RESOLUTION	: 1mV
ACCURACY	: $\pm$ 2 mV
DIGITAL OUTPUT	: 5A, 1CO, RELAY
ANALOG OUTPUT	: 4~20mA
DISPLAY	: 3.5" Color LCD
BODY	: ABS
OUTER DIMENSIONS	: 96x96x110mm
CUTOUT DIMENSIONS	: 92x92mm

KEY FUNCTION


	TO SET ORP CONTROLLING VALUE
	TO INCREASE VALUE & IT WILL SCROLL 0 TO 9
	TO SHIFT DIGIT
 + 	TO SAVE DATA &EXIT TO MAIN DISPLAY

DISPLAY OFFSET FUNCTION

 + 	HOLD FOR 5 SECOND
	TO INCREASE VALUE & IT WILL SCROLL - OR + & 0 TO 9
	TO SHIFT DIGIT
 + 	TO SAVE DATA &EXIT TO MAIN DISPLAY

**ARANKA**Solution
with **Perfection**

WIRING DIAGRAM

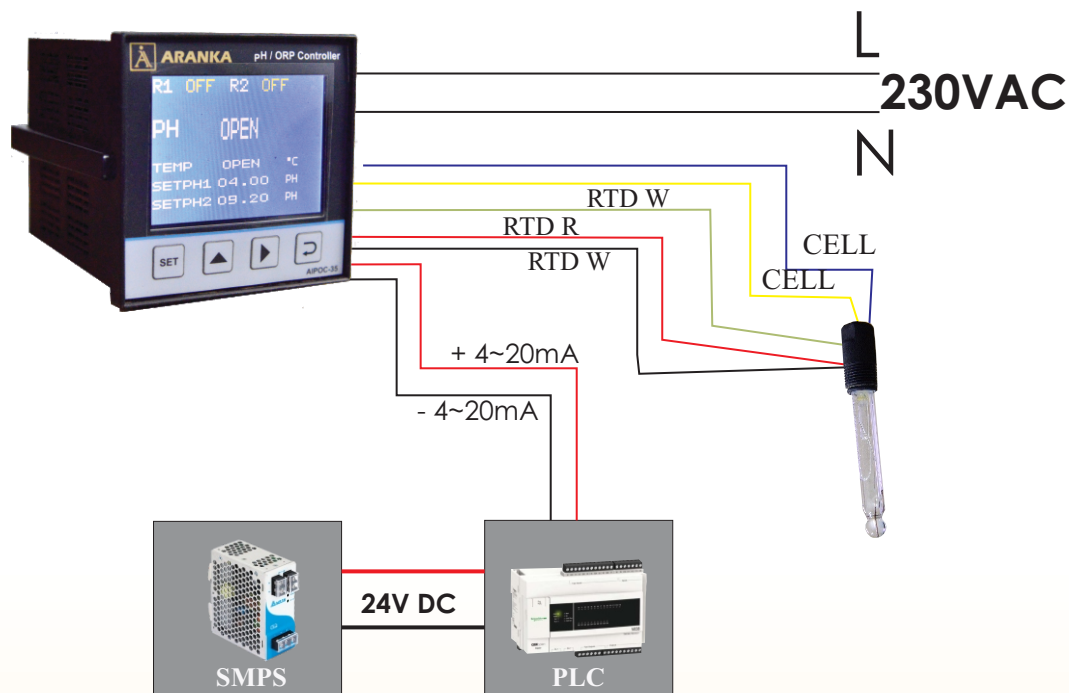

SR NO: _____

**ARANKA** INSTRUMENTS **LLP**

Reg. Address :

16, DHARMADEVNAGAR,

Opp. SAMARATNAGAR,

ISANPUR, Ahmedabad - 382443.

Web : www.arankainstruments.come-mail : utkarsh@arankainstruments.com, contact@arankainstruments.com

Cont. : (F) 09909035088, +91 93288 88879

FACTORY. :

100, NILKANTH INDUSTRIAL PARK,

AMBIKA TUBE COMPOUND,

NEAR OVER BRIDGE VATVA, GIDC,

Vatva, Ahmedabad - 382445.